SG4-50T

FOUT POST WHEEL ALIGNMENT LIFT

Lifting Capacity	Lifting Height	Secondary lifting height	Secondary lifting weight	Power of motor	Oil Pressure	Power supply	Rise Time	Lowering Time
5000KGS	1850mm	350mm	3.0T	3.0KW	18Mpa	110-240V/380-41 5V 1/3PH, 50Hz/60Hz	50s	40s
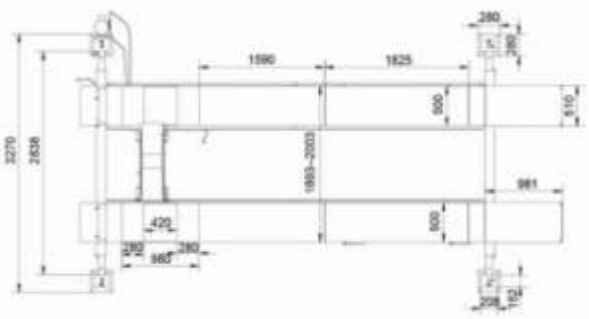
1. 5000KGS/ 11000LBS Capacity;
2. Single point manual lock release;
3. Heavy duty, stainless lifting cable;
4. Slave runway adjustable to cater for various wheel base vehicles.
S. Height limit switch;
6. With anti-surge valve in case of hydraulic hose burst;
7. cable anti-break device to double ensure the safety;
8. ETL and CE certified motor;
9. Single hydraulic cylinder hidden away under the runway for Min exposure and Max reliable performance.