



P

产品介绍
Products Introduction

TRUCK TYRE CHANGER T598




Wireless Remote Control Unit
OPTIONAL 遥控可选



- SEMI-AUTOMATIC UNIVERSAL TRUCK TYRE CHANGER T598 FOR INDUSTRIAL, AGRICULTURAL AND EARTHMOVING WHEELS
- RIM CAPACITY 14" -42"
- ITALIAN PUMP OPTIONAL

- 半自动多功能轮胎拆装机
- 适用于轮辋直径为14"-42"的工业、农业、工程车轮胎
- 意大利泵可选

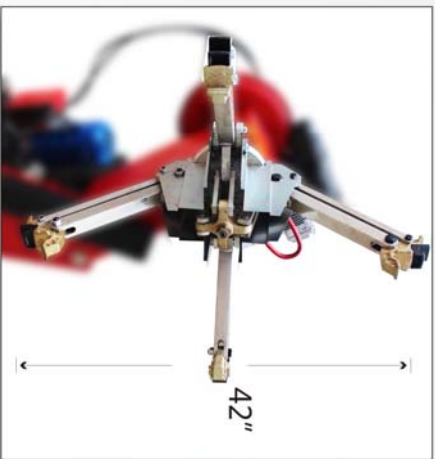

UNIVERSAL SELF-CENTRING CHUCK, OPERATE SIZE FROM 14" TO 42"通用自动定心卡盘,操作尺寸从14" 到 42"

OPTIONAL ACCESSORIES 可选配件



Tubeless roller 真空胎压滚



Alu alloy rims protection rings
铝合金轮胎保护圈



Alu alloy rims protection set
铝合金轮胎保护套



STANDARD ACCESSORIES标准配件

TECHNICAL DATA 技术参数

Rim diameter 轮胎直径	14" -42"
Max wheel weight 最大车轮重量	1600kg
Max wheel width 最大车轮宽度	1050mm
Max tyre diameter 最大轮胎直径	2300mm
Hydraulic pump motor 液压动力单元	2.2kw 380V~3ph-50Hz(220V Optional)
Gearbox motor 齿轮箱电机	2.2kw 380V~3ph-50Hz(220V Optional)
Bend breaker force 弯曲压力	33000kg
Operation control voltage 移动控制手柄电压	24V
Machine weight approx. 设备净重	758kg
Overall dimensions approx. 设备占地面积	2500 × 2000mm
Power 电压	220/400V 50/60Hz(1P/3P Optional可选)
Noise level 噪音指数	≤70db
Temperature 温度	0°C-40°C

WEIGHT & DIMENSIONS 重量&包络尺寸

Model	Gross Weight (kg)	Outside Dimension LxWxH (mm)
T598	850	2130*1850*1050